
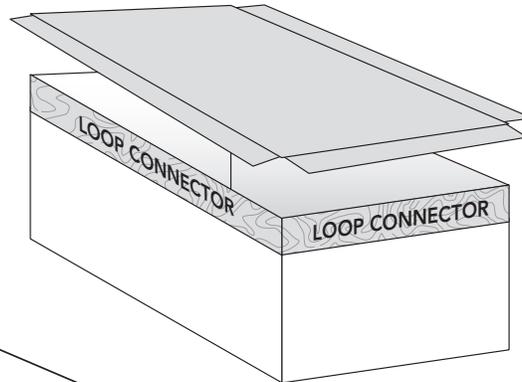


## 40" PIT INSTALLATION / ASSEMBLY RECOMMENDATIONS

**IMPORTANT NOTE:**  
Assemble filler foam **UP-SIDE-DOWN**. Bottom enclosure is then pulled over assembled stack then flipped up-right.

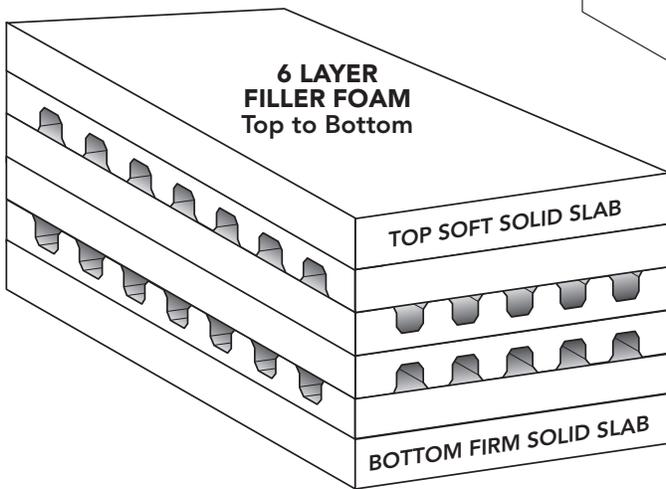

**REMOVABLE TOP**  
with Hook connector flaps all sides

**BASE ENCLOSURE**  
with Loop connector all sides

- ← 8" thick **SOFT** solid foam slab
- ← 6" thick, ripples in short direction facing **DOWN**
- ← 6" thick, ripples in long direction facing **UP**
- ← 6" thick, ripples in long direction facing **DOWN**
- ← 6" thick, ripples in short direction facing **UP**
- ← 8" thick **FIRM** solid foam slab

**NOTE: READ THESE RECOMMENDATIONS COMPLETELY BEFORE STARTING TO INSTALL OR ASSEMBLE THIS PRODUCT. IF YOU REQUIRE FURTHER INFORMATION, PLEASE CALL OUR OFFICE AT (310) 830-6672.**

Due to the size of this product, it is shipped unassembled to reduce your freight cost as well as the possibility of shipping damage. Assembly is easy and will acquaint you with Norbert's exclusive interchangeable filler feature. Supplied components are as illustrated above plus one can of spray adhesive.

1. Find a large clean area (free-x floor area is ideal) to assemble your pit. No tools required. Foam glue is supplied to repair any foam seam separation (if any) and for bonding foam layers together. Follow instructions on can.
2. **NOTE:** Filler foam is stacked **UP-SIDE DOWN** then the base enclosure is pulled over the full stack and flipped up-right. Working your way around the stack, spray a small amount of adhesive onto top & bottom surfaces of each slab in stack including inward facing corner surfaces of top and bottom slabs. The idea is to bond entire stack together so that it won't shift out of line during assembly. Glue will begin to get tacky in about a minute. As it does, pinch all surfaces together until all slabs are bonded together.
3. After foam stack and base enclosure are flipped up-right, you may need to lift and shake the foam to ensure it is properly in place. If necessary, reach into corners and adjust until bottom corners of foam fill out corners of cover.
4. Pull top cover section over foam and adjust until all four corners are in line. Pull taut and fasten hook connector on the inside flap of removable top cover, to the loop connector on sides of bottom enclosure.

**TIP:** Periodically remove foam stack from cover, flip it over and reassemble to promote even wear.

### **⚠ IMPORTANT CONSUMER PRODUCT HAZARD WARNING — PLEASE READ!**

A possibility of serious injury, including paralysis or death, is inherent in any activity involving motion or height. Equipment with which this notice is included is intended for use only by properly trained, qualified persons under supervised conditions. Use without proper supervision is dangerous and should not be undertaken or permitted. Know your limitations as well as the limitations of your equipment. Consult a qualified instructor before attempting any new activity or skill. This equipment must be used with proper mats, spotting equipment and qualified spotters for each activity or skill. Use this equipment only for its intended purpose. Do not modify equipment in any way. Inspect each component for damage, loose fittings or signs of wear before each use. Do not use if you have any concern as to the condition of this equipment. Test unit for stability prior to each use. Do not use if you have any concern about the stability, condition or suitability of this equipment. Inspect warning labels and replace when marred or damaged. Before each subsequent use, re-check equipment stability and settings.