

MA FLOOR INSTRUCTIONS FOR INSTALLATION AROUND A POST

Our Vinyl Cement provides a super-strong, waterproof and flexible chemical bond. Ideal for joining large sections of vinyl together. Before using, thoroughly read these instructions and the instructions on the can of cement.

These instructions pertain to MA Floor Installation when you have one or more post(s) in your MA floor area. This will require the installer to cut the vinyl so it can wrap around the post(s). Choose the shortest distance between the post and the edge of the floor area to make this cut. If this is a high traffic area, a longer cut in a low traffic area may be a better choice, use your own judgement when considering your installation plan. Once you have decided on your installation plan, provide the length of each cut to your Norbert's sales representative so we can provide the required vinyl strips and vinyl cement that will be needed for your installation. There is no charge for the additional vinyl strips, however there is a nominal fee for the can(s) of vinyl cement required for your installation. **CAREFULLY** measure the vinyl and make your cut for where the vinyl needs to wrap around the post(s). Cut an "X" where the center of the post would be so the vinyl can wrap around the post. Lay the vinyl strips down where they will be glued to the tarp and use a soft lead pencil to outline the edge of the vinyl strip, these marks will indicate where to apply the vinyl cement. Clean both surfaces being joined together to remove all residue, dirt, grease, etc. Using the brush attached to the lid of the can (inside the can) to apply a moderate amount of cement to **BOTH** the vinyl strip(s) and the outlined floor area, be sure to **COVER THE ENTIRE AREA OF BOTH SURFACES** with cement. We recommend that you do not attempt to glue more than a 60" vinyl strip section at a time. Break the gluing sections down to whatever is comfortable for you.

IMPORTANT: Allow the cement to dry for 2-5 minutes **BEFORE** you apply the vinyl strip to the outlined floor area, this will allow the cement to "set" and create a strong and permanent bond. Failure to allow the cement to "set" will compromise the strength of your repair seam.

Once the vinyl surfaces are joined, apply pressure to the entire glued area to make sure the bond sets.

IMPORTANT: Although our cement is fast drying, it is imperative that you allow the vinyl cement to dry and cure for **24 HOURS BEFORE YOU ATTACH THE VINYL TARP TO THE FLOOR BORDER.**

Please review the illustrated floor example on reverse or next page.

VINYL CEMENT PRECAUTIONS:

Danger – Flammable Mixture. Do Not Use Near Fire or Flame. Use with Adequate Ventilation. Vapor May Cause Flash Fire. Avoid Prolonged Breathing of Vapor and Contact With Eyes and Skin.


KEEP OUT OF REACH OF CHILDREN

⚠ IMPORTANT CONSUMER PRODUCT HAZARD WARNING — PLEASE READ!

A possibility of serious injury, including paralysis or death, is inherent in any activity involving motion or height. Equipment with which this notice is included is intended for use only by properly trained, qualified persons under supervised conditions. Use without proper supervision is dangerous and should not be undertaken or permitted. Know your limitations as well as the limitations of your equipment. Consult a qualified instructor before attempting any new activity or skill. This equipment must be used with proper mats, spotting equipment and qualified spotters for each activity or skill. Use this equipment only for its intended purpose. Do not modify equipment in any way. Inspect each component for damage, loose fittings or signs of wear before each use. Do not use if you have any concern as to the condition of this equipment. Test unit for stability prior to each use. Do not use if you have any concern about the stability, condition or suitability of this equipment. Inspect warning labels and replace when marred or damaged. Before each subsequent use, re-check equipment stability and settings.

MA FLOOR INSTRUCTIONS FOR INSTALLATION AROUND A POST

Illustrated example looking down on a MA Floor with a single post within the flooring area.

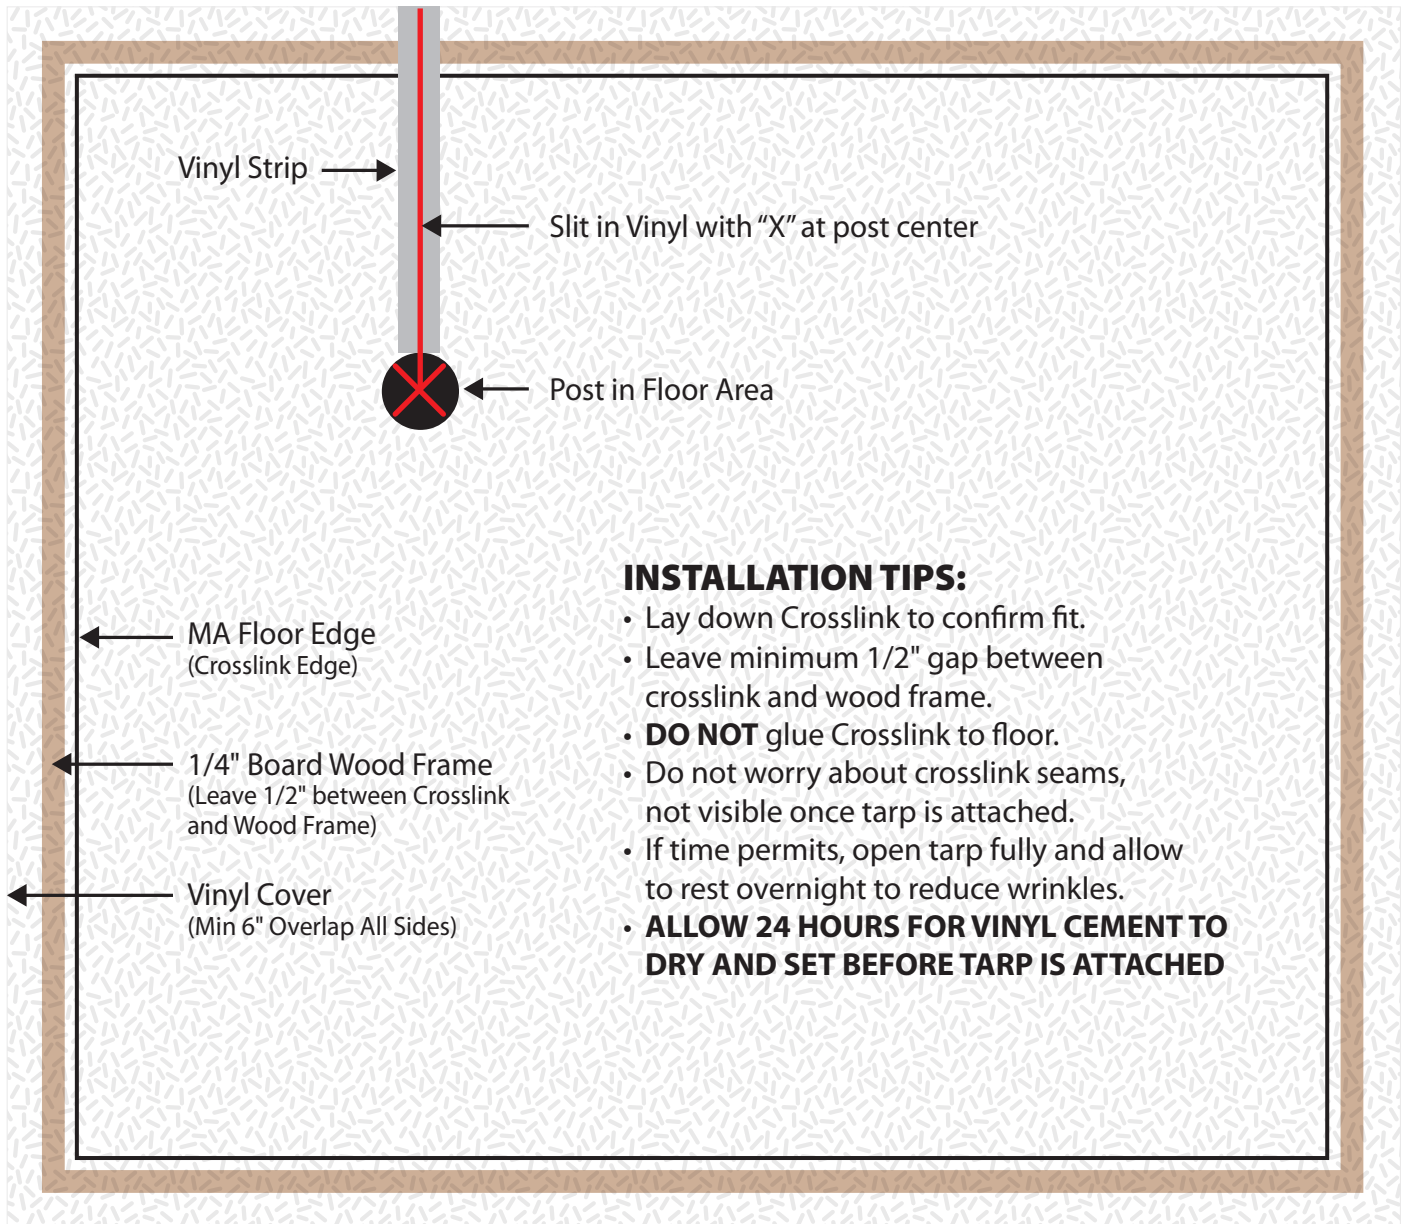

IMPORTANT CONSUMER PRODUCT HAZARD WARNING — PLEASE READ!

A possibility of serious injury, including paralysis or death, is inherent in any activity involving motion or height. Equipment with which this notice is included is intended for use only by properly trained, qualified persons under supervised conditions. Use without proper supervision is dangerous and should not be undertaken or permitted. Know your limitations as well as the limitations of your equipment. Consult a qualified instructor before attempting any new activity or skill. This equipment must be used with proper mats, spotting equipment and qualified spotters for each activity or skill. Use this equipment only for its intended purpose. Do not modify equipment in any way. Inspect each component for damage, loose fittings or signs of wear before each use. Do not use if you have any concern as to the condition of this equipment. Test unit for stability prior to each use. Do not use if you have any concern about the stability, condition or suitability of this equipment. Inspect warning labels and replace when marred or damaged. Before each subsequent use, re-check equipment stability and settings.